



Non-Woven Mesh Belt Cleaning Machine

Operating Instructions

Contents:

1. Operation steps
2. Startup Important Notes
3. Shutdown Steps

1. Operation steps



Warning: Please do not point the nozzle towards people's bodies, hands, or feet to avoid injury.


1.1. Connect the hot air outlet.




1.2. Plug in the head grabbing power supply.




1.3. Connect the air hose.

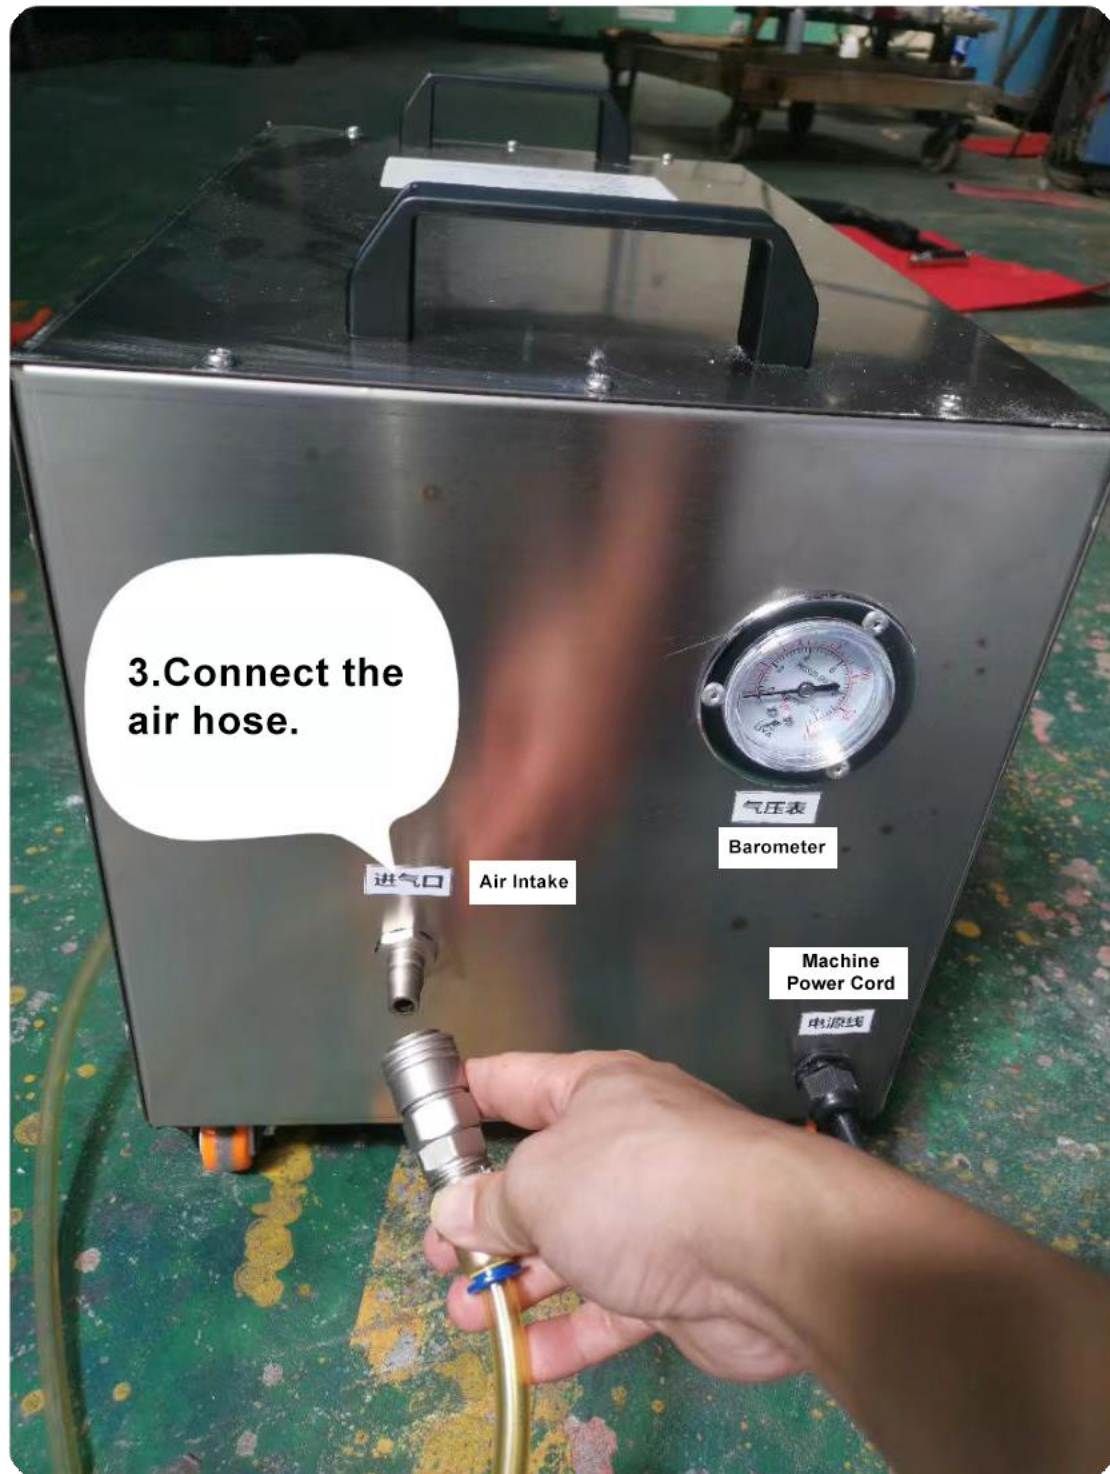

1.4. Power on the machine.

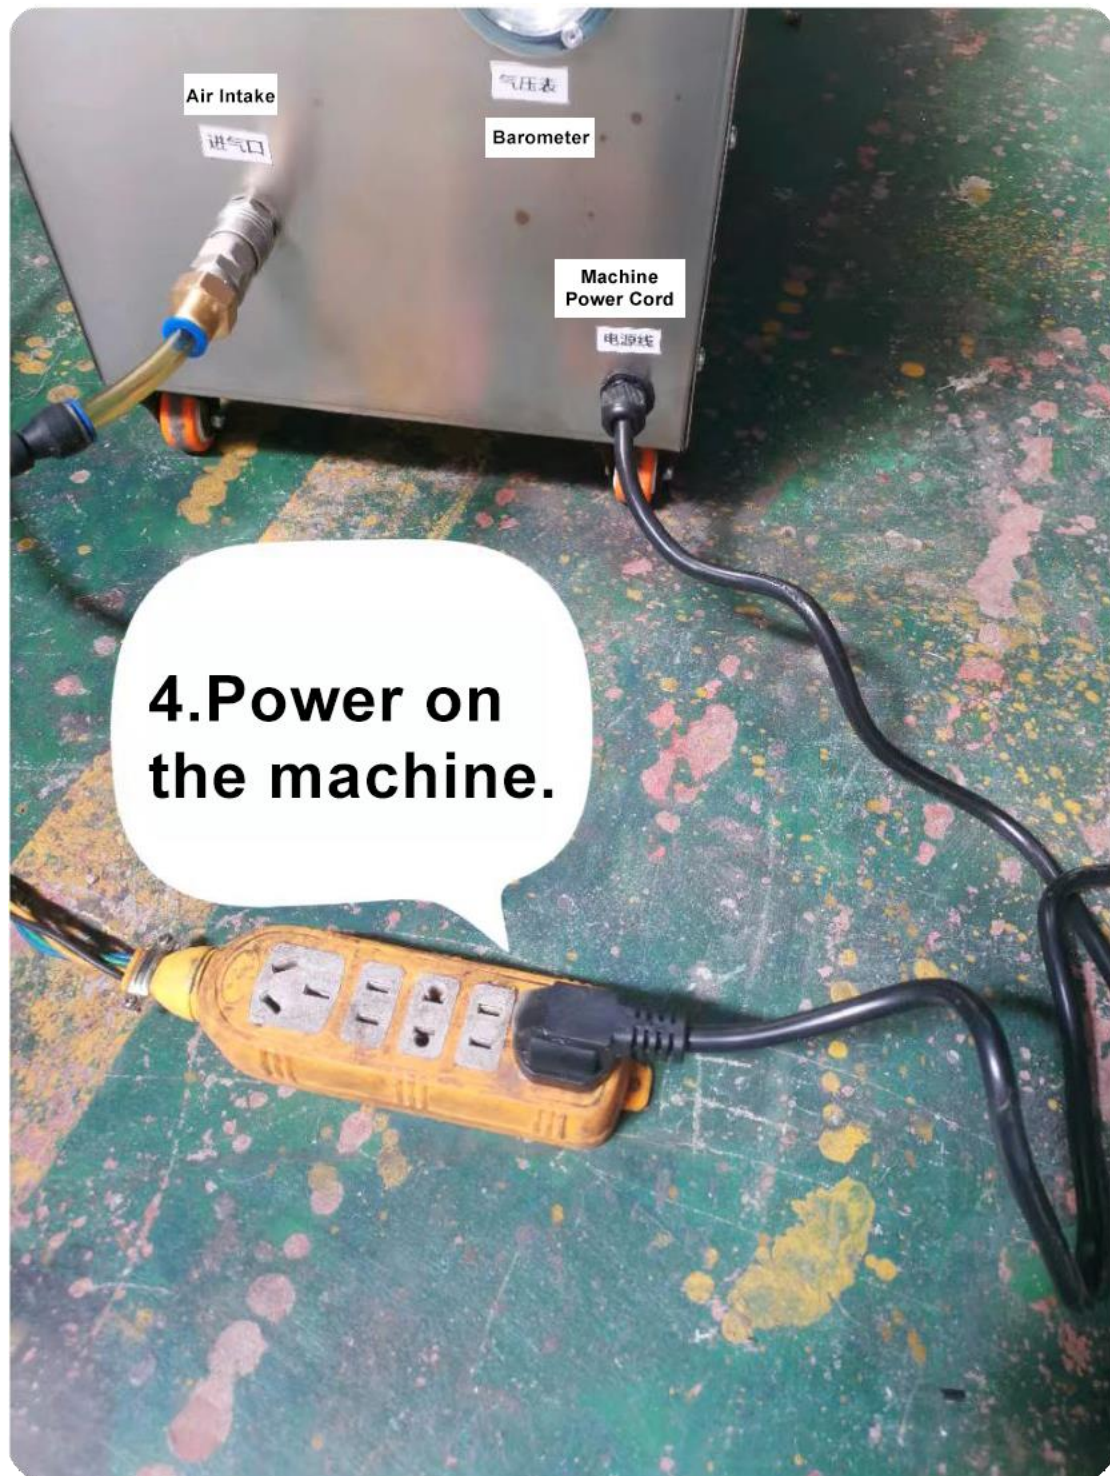

1.5. Ensure the air pressure gauge shows 4 pressure values or more.

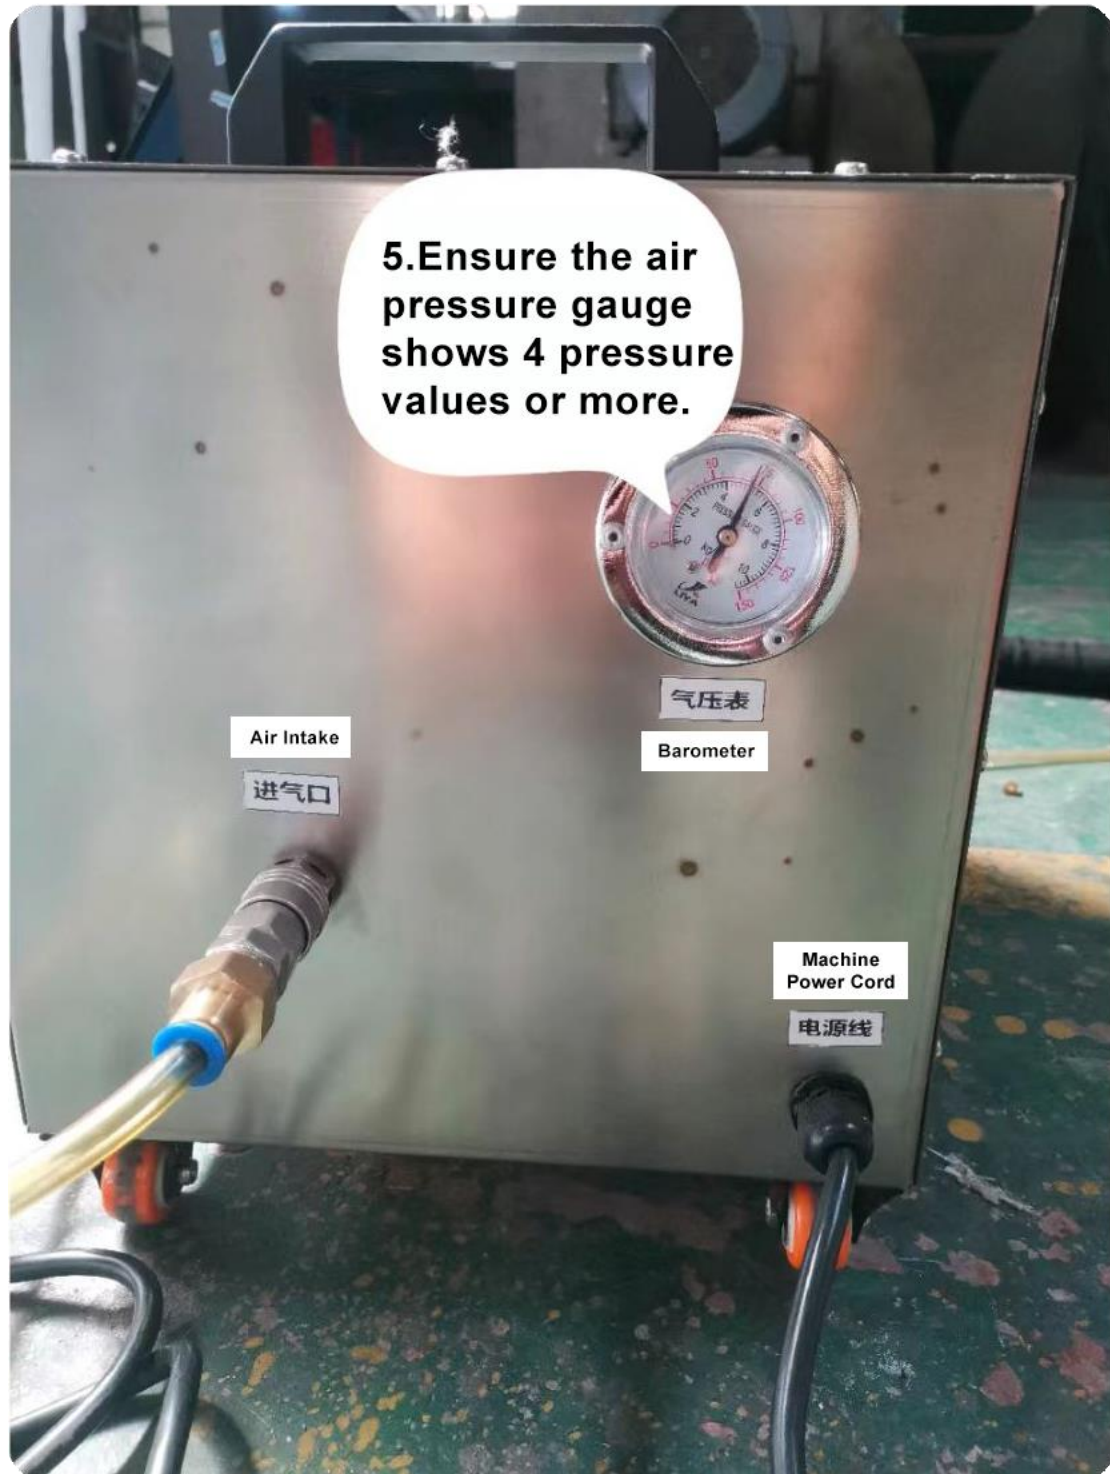

1.6. Turn on the heating switch and wait for 1 minute before normal use.



2. Startup Important Notes

2.1. Ensure the air hose is connected to the machine and the air pressure gauge shows 4 or more pressure values. Do not use the machine if the pressure is below 4.

2.2. After powering on the machine and confirming sufficient air pressure, turn on the heating switch. Wait approximately 2 minutes before use. Set the temperature to 130 degrees Celsius and the frequency to 50. You can adjust the temperature setting based on your actual usage.

2.3. When using, hold the spray gun nozzle 2-3 mm away from the residue on the mesh belt that needs cleaning. Move it slowly back and forth until the residue is blown off. Do not hold it in the same position for too long.



Warning:

The pressure value must be greater than 4 before you turn on the heating switch, otherwise the machine may burn out.

3. Shutdown Steps

3.1. First, turn off the heating switch.

3.2. The machine needs to remain ventilated for at least 3 minutes before disconnecting the air hose.



Warning:

You must first turn off the heating switch and wait for at least 3 minutes for the machine to cool down before disconnecting the air hose, otherwise the machine may burn out.